

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
WO 2004/030413 A1

(51) International Patent Classification<sup>7</sup>:

H05B 6/12

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/SE2003/001470

(22) International Filing Date:

22 September 2003 (22.09.2003)

(25) Filing Language:

English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language:

English

(30) Priority Data:

02102386.6 26 September 2002 (26.09.2002) EP

Published:


— with international search report

(71) Applicant and  
(72) Inventor: ALFREDEEN, Lennart [SE/SE]; Sjöilden 38,  
S-142 64 Trångsund (SE).

(74) Agent: DR LUDWIG BRANN PATENTBYRÅ AB; P O  
Box 17192, S-104 62 Stockholm (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FRYING HOB ARRANGEMENT

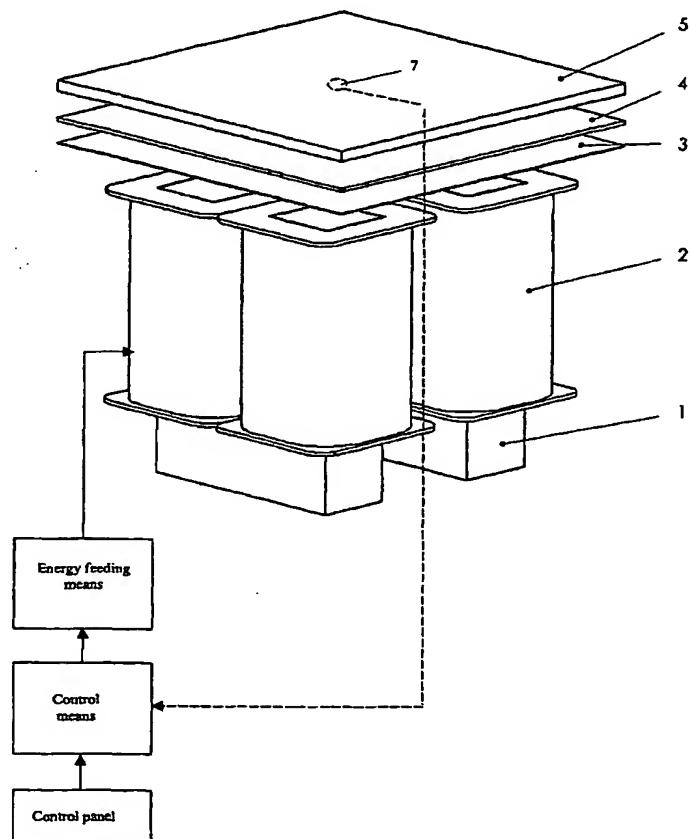

(57) Abstract: Frying hob arrangement comprising a planar heating means (5) including a ferromagnetic material and constituting a frying surface. The arrangement comprises at least two magnetic field generators (1, 2) each having two free ends, wherein said heating means is arranged in or close to a plane defined by said free ends. The magnetic field generators are controlled by a control means such that they are adapted to generate alternating magnetic fields in said planar heating means, wherein the magnetic fields are converted into heat in said heating means. The magnetic fields being such that the magnetic field through one of said free ends has an opposed direction as compared to the magnetic fields through the other free ends.

WO 2004/030413 A1